


# GPIO接口说明

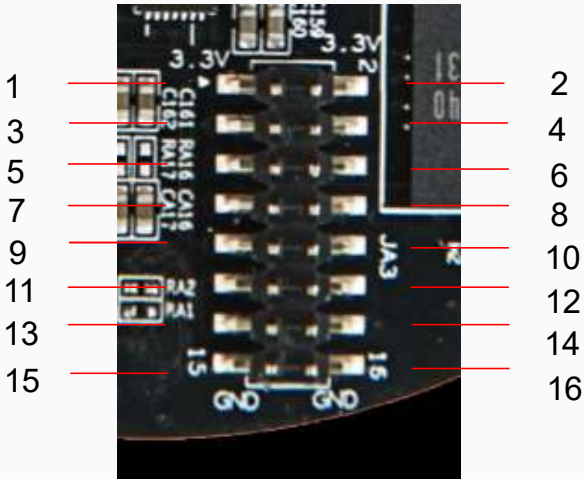

	I/O
	GND
	I2C
	3.3v
	SDMMC/JTAG
	UART
	SDMMC/UART
	SD控制器的时钟
	SD卡数据线
	SD卡插入检测
	电源

GPIO	func 2	func 3	物理引脚		func 3	func 2	GPIO
	3.3v		1	2		3.3v	
GPIO1_C5	SDMMC0_D3	JTAG_TMS_u	3	4	JTAG_TCK_u	SDMMC0_D2	GPIO1_C4
GPIO1_C3	SDMMC0_D1	UART2_RX_u	5	6	UART2_TX_u	SDMMC0_D0	GPIO1_C2
GPIO1_C0	SDMMC0_CLKO_d		7	8		SDMMC0_CMD_u	GPIO1_B7
GPIO1_C1	SDMMC0_DET_u		9	10		SDMMC0_PWR_d	GPIO1_B6
GPIO1_A1	SDMMC1_D0_u		11	12	IR_u	UART1_RTSN	GPIO1_B3
GPIO0_A3	I2C1_SDA	SDMMC1_CMD_u	13	14		I2C1_SCL_u	GPIO0_A2
	GND		15	16		GND	

详情请参考官网SoundPi.org